小象重工集团
MINI ELEPHANT HEAVY INDUSTRY GROUP



2026
企业产品画册
PRODUCT BROCHURE

小象重工集团是一家现代化高科技机械制造企业
Xiao Xiang Heavy Industry Group is a modern high-tech mechanical manufacturing enterprise.

小象蓄力　重工未来

小象重工集团
Mini Elephant Heavy Iindustry Group
地址：山东省济宁市高新区崇文大道1686号
Address: No. 1686, Chongwen Avenue, High-tech Zone, Jining City, Shandong Province
电话/Telephone：+86 18053763180
网址/Website：www.shandongxiaoxiang.com

CONTENT

目录 >>>

01 企业简介 Enterprise profile

02 企业文化 Enterprise culture

03 挖掘机系列 Excavator Series

04 装载机系列 Loader series

05 叉车系列 Forklift series

06 叉装机系列 Forklift Loader Series

07 运输车系列 Transport Vehicle Series

08 挖掘装载机系列 Backhoe Loader Series

09 压路机系列 Road Roller Series

10 割草机系列 Lawn Mower Series

小象重工集团

MINI ELEPHANT HEAVY INDUSTRY GROUP

Mini Elephant



ABOUT US

山东小象重工集团，坐落于山东省济宁市任城区崇文大道1686号，集团总人数500余人，月产销售量3000余台，是一家专注于小型工程机械研发、制造与销售的专业化企业。

公司产品线覆盖广泛，核心产品包括08-40型小型挖掘机、滑移装载机、电动叉车、翻斗运输车等一系列小型工程机械。

公司通过了ISO9001质量体系认证，被评定高新技术企业，拥有多项专利技术。公司产品主要销往欧洲、美国、加拿大、澳大利亚等发达国家，同时销往全国30多个省份和自治区。

Shandong Xiaoxiang Heavy Industry Group is located at No. 1686, Chongwen Avenue, Rencheng District, Jining City, Shandong Province. The total number of employees in the group is over 500, and the monthly production and sales volume is over 3,000 units. It is a specialized enterprise focusing on the research, manufacturing and sales of small construction machinery.

The company's product line is extensive, with core products including 08-40 type small excavators, sliding loaders, crawler forklifts, dump transport vehicles and other series of small construction machinery.

The company has obtained ISO9001 quality system certification and has been rated as a high-tech enterprise. It holds a number of patent technologies. The company's products are mainly sold to developed countries such as Europe, the United States, Canada and Australia, as well as to more than 30 provinces and autonomous regions across the country.

FACTORIES UNDER THE GROUP
集团下属工厂



山东小象工程机械有限公司



小象重工机械(盐城)有限公司



山东竣工工程机械有限公司



小象重工(山东)有限公司



山东崇工工程机械有限公司



山东东田重工有限公司

CORPORATE CULTURE
企业文化

核心文化 CORE CULTURE

以客户为中心，以奋斗者为本，以价值为纲；要谦虚，要反省，要长期坚持艰苦奋斗；建设一座幸福的小象工厂，成就百年小象重工。

Centered on customers, based on hard workers, guided by value; be humble, reflect on yourself, and persist in hard work over the long term; build a happy little elephant factory,and achieve the century-long success of Little Elephant Heavy Industry.

使命 MISSION

成为中国最优秀的小型工程机械 OEM 生产商。

Become the most outstanding OEM manufacturer of small construction machinery in China.

愿景 VISION

建设一座幸福的小象工厂

Build a happy little elephant factory

员工幸福 Employee happiness

客户幸福 Customer happiness

国家幸福 National happiness



小象重工集团
MINI ELEPHANT HEAVY INDUSTRY GROUP

01

挖掘机系列

xcavator Series



挖掘机系列
Excavator Series

QH09



性能特点/CHARACTERISTIC

- 采用优质品牌发动机，性能稳定，油耗低
  Using high-quality brand engines, the performance is stable and the fuel consumption is low.
- 机身小巧，操作灵活，适用于各种狭窄空间作业
  The body is compact and the operation is flexible, making it suitable for various operations in narrow spaces.
- 采用优质碳钢，打砂喷塑工艺，漆面更牢固，不易上锈
  Using high-quality carbon steel and sandblasting and powder coating techniques, the paint surface is more durable and less prone to rusting.
- 操作简单易学，动作精准可控
  The operation is simple and easy to learn, with precise and controllable movements.

产品展示/Product display








产品用途/Product application

适用于室内装修破碎、果园挖沟除草，大棚翻土种植、农村下水道清淤等。
Suitable for indoor decoration demolition, orchard ditch excavation and weed removal, greenhouse soil turning for planting, and rural sewerage dredging, etc.

选装配置/Optional equipment

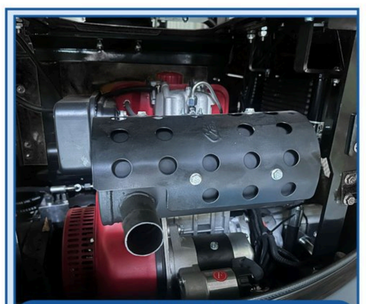
发动机可选配：科普192（欧五）、常柴192、百力通25T2、润通R420
Engine optional: Koop 192 (Euro V), Changchai 192, Briggs&Stratton 25T2、RATO R420

配置可选：四腿棚
Optional configurations: four legged shed

发动机型号	科普192F	Engine type	KOOP192F
动力种类	单缸/四冲程/风冷/立式	Power types	Single-cylinder, four-stroke, air-cooled, vertical
排量（L）	0.499	Displacement (L)	0.499
额定功率（kw/rpm）	7.6/3000	Rated power (kw / rpm)	7.6/3000
马力（HP）	10.3	Horsepower (HP)	10.3
燃油种类	柴油	Fuel types	Diesel oil
油耗（g/kwh）	275	Fuel consumption (g / kwh)	275
燃油容量 (L)	5.5	Fuel Fuel Capacity (L)	5.5
机油容量 (L)	1.65	Oil capacity (L)	1.65
整机尺寸（mm）	2430*720*1390	Overall machine size (mm)	2430*720*1390
履带接地长度（mm）	1140	Trace ground length (mm)	1140
履带宽度（mm）	150	Trace width (mm)	150
挖掘最大深度（mm）	1300	Max maximum depth (mm)	1300
卸载最大高度（mm）	1600	Unload maximum height (mm)	1600
挖掘最大高度（mm）	2350	Excavmaximum height (mm)	2350
爬坡能力	30°	Climbing capacity	30°
行走速度（km/h）	0-2.5	Walking speed (km/h)	0-2.5
铲斗挖掘力（kn）	6.5	Bucket excavation force (kn)	6.5

细节展示/Details presentation


复合式操作台
Compound operation console


品牌发动机
Brand engine


行走马达
Walking motor

挖掘机系列
Excavator Series

QH12-1



性能特点/CHARACTERISTIC

- 采用优质品牌发动机，性能稳定，油耗低
  Using high-quality brand engines, the performance is stable and the fuel consumption is low.
- 机身小巧，操作灵活，适用于各种狭窄空间作业
  The body is compact and the operation is flexible, making it suitable for various operations in narrow spaces.
- 采用优质碳钢，打砂喷塑工艺，漆面更牢固，不易上锈
  Using high-quality carbon steel and sandblasting and powder coating techniques, the paint surface is more durable and less prone to rusting.
- 操作简单易学，动作精准可控
  The operation is simple and easy to learn, with precise and controllable movements.

产品展示/Product display








产品用途/Product application

适用于山地开荒、室内装修破碎、果园挖沟除草，大棚翻土种植、农村下水道清淤等。
It is suitable for mountain land reclamation, indoor decoration demolition, orchard ditch digging and weeding, greenhouse soil turning and planting, rural sewer dredging, etc.

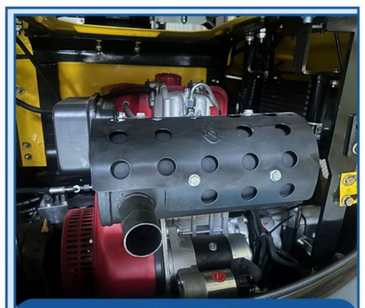
选装配置/Optional equipment

发动机可选配：锂电、科普192（欧五）、常柴192、百力通25T2、润通R420
Engine optional:Lithium battery、 Koop 192 (Euro V), Changchai 192, Briggs&Stratton 25T2、RATO R420
配置可选：四腿棚、驾驶室、大臂侧摆、底盘伸缩
Optional configurations: four legged shed, driver's cab, large arm side swing, chassis extension and retraction

发动机型号	科普192F	Engine type	KOOP192F
动力种类	单缸/四冲程/风冷/立式	Power types	Single-cylinder, four-stroke, air-cooled, vertical
排量（L）	0.499	Displacement (L)	0.499
额定功率（kw/rpm）	7.6/3000	Rated power (kw / rpm)	7.6/3000
马力（HP）	10.3	Horsepower (HP)	10.3
燃油种类	柴油	Fuel types	Diesel oil
油耗（g/kwh）	275	Fuel consumption (g / kwh)	275
燃油容量 (L)	5.5	Fuel Fuel Capacity (L)	5.5
机油容量 (L)	1.65	Oil capacity (L)	1.65
整机尺寸（mm）	2870*1000*2030	Overall machine size (mm)	2870*1000*2030
履带接地长度（mm）	1200	Trace ground length (mm)	1200
履带宽度（mm）	180	Trace width (mm)	180
挖掘最大深度（mm）	1700	Max maximum depth (mm)	1700
卸载最大高度（mm）	1745	Unload maximum height (mm)	1745
挖掘最大高度（mm）	2580	Excavmaximum height (mm)	2580
爬坡能力	30°	Climbing capacity	30°
行走速度（km/h）	0-2.5	Walking speed (km/h)	0-2.5
铲斗挖掘力（kn）	11.5	Bucket excavation force (kn)	11.5

细节展示/Details presentation


复合式操作台
Compound operation console


品牌发动机
Brand engine


行走马达
Walking motor

挖掘机系列
Excavator Series
QH12-3



性能特点/CHARACTERISTIC

- 采用优质品牌发动机，性能稳定，油耗低
  Using high-quality brand engines, the performance is stable and the fuel consumption is low.
- 机身小巧，操作灵活，适用于各种狭窄空间作业
  The body is compact and the operation is flexible, making it suitable for various operations in narrow spaces.
- 采用优质碳钢，打砂喷塑工艺，漆面更牢固，不易上锈
  Using high-quality carbon steel and sandblasting and powder coating techniques, the paint surface is more durable and less prone to rusting.
- 操作简单易学，动作精准可控
  The operation is simple and easy to learn, with precise and controllable movements.

产品展示/Product display








产品用途/Product application

适用于山地开荒、室内装修破碎、果园挖沟除草，大棚翻土种植、农村下水道清淤等。
It is suitable for mountain land reclamation, indoor decoration demolition, orchard ditch digging and weeding, greenhouse soil turning and planting, rural sewer dredging, etc.

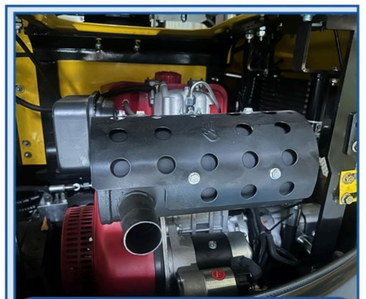
选装配置/Optional equipment

发动机可选配：锂电、科普192（欧五）、常柴192、百力通25T2、润通R420
Engine optional:Lithium battery、 Koop 192 (Euro V), Changchai 192, Briggs&Stratton 25T2、RATO R420
配置可选：四腿棚、驾驶室、大臂侧摆、底盘伸缩
Optional configurations: four legged shed, driver's cab, large arm side swing, chassis extension and retraction

发动机型号	科普192F	Engine type	KOOP192F
动力种类	单缸/四冲程/风冷/立式	Power types	Single-cylinder, four-stroke, air-cooled, vertical
排量（L）	0.499	Displacement (L)	0.499
额定功率（kw/rpm）	7.6/3000	Rated power (kw / rpm)	7.6/3000
马力（HP）	10.3	Horsepower (HP)	10.3
燃油种类	柴油	Fuel types	Diesel oil
油耗（g/kwh）	275	Fuel consumption (g / kwh)	275
燃油容量 (L)	5.5	Fuel Fuel Capacity (L)	5.5
机油容量 (L)	1.65	Oil capacity (L)	1.65
整机尺寸（mm）	2870*1000*2030	Overall machine size (mm)	2870*1000*2030
履带接地长度（mm）	1200	Trace ground length (mm)	1200
履带宽度（mm）	180	Trace width (mm)	180
挖掘最大深度（mm）	1700	Max maximum depth (mm)	1700
卸载最大高度（mm）	1745	Unload maximum height (mm)	1745
挖掘最大高度（mm）	2580	Excavmaximum height (mm)	2580
爬坡能力	30°	Climbing capacity	30°
行走速度（km/h）	0-2.5	Walking speed (km/h)	0-2.5
铲斗挖掘力（kn）	11.5	Bucket excavation force (kn)	11.5

细节展示/Details presentation


复合式操作台
Compound operation console


品牌发动机
Brand engine


行走马达
Walking motor

挖掘机系列
Excavator Series
QH30



性能特点/CHARACTERISTIC

- 采用优质品牌发动机，性能稳定，油耗低
  Using high-quality brand engines, the performance is stable and the fuel consumption is low.
- 机身小巧，操作灵活，适用于各种狭窄空间作业
  The body is compact and the operation is flexible, making it suitable for various operations in narrow spaces.
- 采用优质碳钢，打砂喷塑工艺，漆面更牢固，不易上锈
  Using high-quality carbon steel and sandblasting and powder coating techniques, the paint surface is more durable and less prone to rusting.
- 操作简单易学，动作精准可控
  The operation is simple and easy to learn, with precise and controllable movements.

产品展示/Product display













产品用途/Product application

适用于市政工程、园林绿化、山地开荒、拆迁破碎、管道挖掘等。

It is applicable to municipal engineering, landscaping, mountain land reclamation, demolition and crushing, pipeline excavation, etc.

选装配置/Optional equipment

发动机可选配：常柴390、莱动385（欧五）、久保田D902

Engine options available: Changche 390, Laodong 385 (Euro V), Kubota D902

配置可选：顶棚、底盘伸缩、高低速、内置马达；

Optional configurations: ceiling， boom side swing, chassis extension and retraction

发动机型号	久保田D1105	Engine type	KubotaD1105
动力种类	四冲程/风冷/立式	Power types	four-stroke, air-cooled, vertical
排量（L）	1.12	Displacement (L)	1.12
最大功率（kw/rpm）	21.7/3600	Rated power (kw / rpm)	21.7/3600
马力（HP）	29.5	Horsepower (HP)	29.5
燃油种类	柴油	Fuel types	Diesel oil
机油容量 (L)	5.1	Fuel consumption (g / kwh)	5.1
操作重量 (kg)	3000	Fuel Fuel Capacity (L)	3000
铲斗容量（m^3）	0.054	Oil capacity (L)	0.054
整机尺寸（mm）	4000*1300*2300	Overall machine size (mm)	4000*1300*2300
履带接地长度（mm）	1700	Trace ground length (mm)	1700
履带宽度（mm）	230	Trace width (mm)	230
挖掘最大深度（mm）	2350	Max maximum depth (mm)	2350
卸载最大高度（mm）	2700	Unload maximum height (mm)	2700
挖掘最大高度（mm）	3200	Excavmaximum height (mm)	3200
爬坡能力	92°	Side swing angle	92°
行走速度（km/h）	0-5	Walking speed (km/h)	0-5
铲斗挖掘力（kn）	20	Bucket excavation force (kn)	20

细节展示/Details presentation



液压先导操作
Hydraulic pilot operation



品牌发动机
Brand engine



行走马达
Walking motor

挖掘机系列
Excavator Series

ME08



性能特点/CHARACTERISTIC

- 采用优质品牌发动机，性能稳定，油耗低
  Using high-quality brand engines, the performance is stable and the fuel consumption is low.
- 机身小巧，操作灵活，适用于各种狭窄空间作业
  The body is compact and the operation is flexible, making it suitable for various operations in narrow spaces.
- 采用优质碳钢，打砂喷塑工艺，漆面更牢固，不易上锈
  Using high-quality carbon steel and sandblasting and powder coating techniques, the paint surface is more durable and less prone to rusting.
- 操作简单易学，动作精准可控
  The operation is simple and easy to learn, with precise and controllable movements.

产品展示/Product display








产品用途/Product application

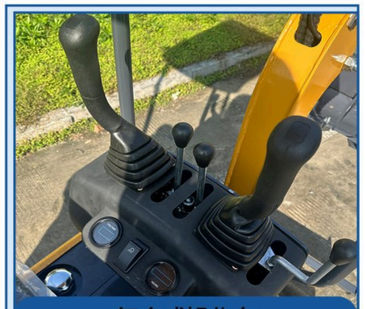
适用于室内装修破碎、果园挖沟除草，大棚翻土种植、农村下水道清淤等。
Suitable for indoor decoration demolition, orchard ditch excavation and weed removal, greenhouse soil turning for planting, and rural sewerage dredging, etc.

选装配置/Optional equipment

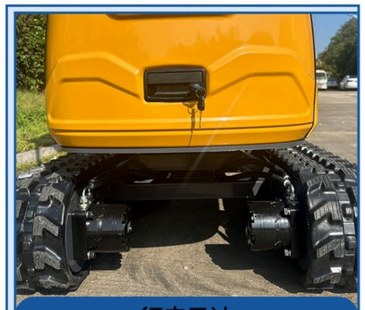
发动机可选配：科普192（欧五）、常柴192、百力通25T2、润通R420
Engine optional: Koop 192 (Euro V), Changchai 192, Briggs&Stratton 25T2、RATO R420
配置可选：四腿棚、大臂侧摆、920mm底盘
Optional configurations: four legged shed, large arm side swing、920mm Chassis

发动机型号	科普192F	Engine type	KOOP192F
动力种类	单缸/四冲程/风冷/立式	Power types	Single-cylinder, four-stroke, air-cooled, vertical
排量（L）	0.499	Displacement (L)	0.499
额定功率（kw/rpm）	7.6/3000	Rated power (kw / rpm)	7.6/3000
马力（HP）	10.3	Horsepower (HP)	10.3
燃油种类	柴油	Fuel types	Diesel oil
油耗（g/kwh）	275	Fuel consumption (g / kwh)	275
燃油容量 (L)	5.5	Fuel Fuel Capacity (L)	5.5
机油容量 (L)	1.65	Oil capacity (L)	1.65
整机尺寸（mm）	2430*720*1390	Overall machine size (mm)	2430*720*1390
履带接地长度（mm）	1140	Trace ground length (mm)	1140
履带宽度（mm）	150	Trace width (mm)	150
挖掘最大深度（mm）	1300	Max maximum depth (mm)	1300
卸载最大高度（mm）	1600	Unload maximum height (mm)	1600
挖掘最大高度（mm）	2350	Excavmaximum height (mm)	2350
爬坡能力	30°	Climbing capacity	30°
行走速度（km/h）	0-2.5	Walking speed (km/h)	0-2.5
铲斗挖掘力（kn）	6.5	Bucket excavation force (kn)	6.5

细节展示/Details presentation


复合式操作台
Compound operation console


品牌发动机
Brand engine


行走马达
Walking motor

挖掘机系列
Excavator Series
ME16



性能特点/CHARACTERISTIC

- 采用优质品牌发动机，性能稳定，油耗低
  Using high-quality brand engines, the performance is stable and the fuel consumption is low.
- 机身小巧，操作灵活，适用于各种狭窄空间作业
  The body is compact and the operation is flexible, making it suitable for various operations in narrow spaces.
- 采用优质碳钢，打砂喷塑工艺，漆面更牢固，不易上锈
  Using high-quality carbon steel and sandblasting and powder coating techniques, the paint surface is more durable and less prone to rusting.
- 操作简单易学，动作精准可控
  The operation is simple and easy to learn, with precise and controllable movements.

产品展示/Product display













产品用途/Product application

适用于山地开荒、市政工程、园林绿化、埋设水电、果园挖沟除草，农村下水道清淤等。
It is suitable for mountain land reclamation, municipal engineering, landscaping, water and electricity installation, orchard ditch digging and weeding, rural sewer dredging, etc.

选装配置/Optional equipment

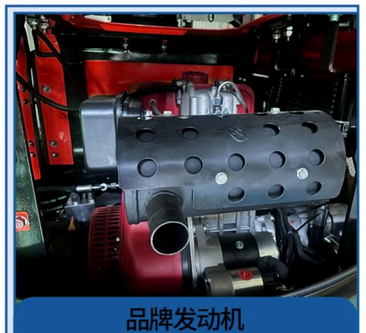
发动机可选配：久保田D722、科普192（欧五）、常柴192、百力通25T2、润通420
Engine optional:Kubota D722、 Koop 192 (Euro V), Changchai 192, Briggs&Stratton 25T2、RATO420
配置可选：驾驶室、大臂侧摆、底盘伸缩
Optional configurations: driver's cab, large arm side swing, chassis extension and retraction.

发动机型号	KOOP 192F	Engine type	KOOP 192F
动力种类	单缸/四冲程/风冷/立式	Power types	Single-cylinder, four-stroke, air-cooled, vertical
排量（L）	0.499	Displacement (L)	0.499
额定功率（kw/rpm）	7.6/3000	Rated power (kw / rpm)	7.6/3000
马力（HP）	10.3	Horsepower (HP)	10.3
燃油种类	柴油	Fuel types	Diesel oil
油耗（g/kwh）	275	Fuel consumption (g / kwh)	275
燃油容量 (L)	5.5	Fuel Fuel Capacity (L)	5.5
机油容量 (L)	1.65	Oil capacity (L)	1.65
整机尺寸（mm）	2870*1000*2230	Overall machine size (mm)	2870*1000*2230
履带接地长度（mm）	1200	Trace ground length (mm)	1200
履带宽度（mm）	180	Trace width (mm)	180
挖掘最大深度（mm）	1800	Max maximum depth (mm)	1800
卸载最大高度（mm）	1745	Unload maximum height (mm)	1745
挖掘最大高度（mm）	2580	Excavmaximum height (mm)	2580
爬坡能力	30°	Climbing capacity	30°
行走速度（km/h）	0-2.5	Walking speed (km/h)	0-2.5
铲斗挖掘力（kn）	11.5	Bucket excavation force (kn)	11.5

细节展示/Details presentation



液压先导操作
Hydraulic pilot operation



品牌发动机
Brand engine



行走马达
Walking motor

挖掘机系列
Excavator Series
ME17



性能特点/CHARACTERISTIC

- 采用优质品牌发动机，性能稳定，油耗低
  Using high-quality brand engines, the performance is stable and the fuel consumption is low.
- 机身小巧，操作灵活，适用于各种狭窄空间作业
  The body is compact and the operation is flexible, making it suitable for various operations in narrow spaces.
- 采用优质碳钢，打砂喷塑工艺，漆面更牢固，不易上锈
  Using high-quality carbon steel and sandblasting and powder coating techniques, the paint surface is more durable and less prone to rusting.
- 操作简单易学，动作精准可控
  The operation is simple and easy to learn, with precise and controllable movements.

产品展示/Product display








产品用途/Product application

适用于山地开荒、室内装修破碎、果园挖沟除草，大棚翻土种植、农村下水道清淤等。
It is suitable for mountain land reclamation, indoor decoration demolition, orchard ditch digging and weeding, greenhouse soil turning and planting, rural sewer dredging, etc.

选装配置/Optional equipment

发动机可选配：莱动385（欧五）
Engine optional: LaiDong 385 (Euro V)
配置可选：驾驶室、大臂侧摆、底盘伸缩
Optional configurations: driver's cab, large arm side swing, chassis extension and retraction.

发动机型号	莱动385	Engine type	Laidong 385
动力种类	三缸/直列/水冷/四冲程	Power types	three-cylinder, in-line,water-cooled, four-stroke
排量（L）	1.6	Displacement (L)	1.6
最大功率（kw/rpm）	29/3200	Maximum Power (kW/rpm)	29/3200
马力（HP）	38	Horsepower (HP)	38
燃油种类	柴油	Fuel types	Diesel oil
油耗（g/kwh）	285	Fuel consumption (g / kwh)	285
燃油容量 (L)	20	Fuel Fuel Capacity (L)	20
铲斗容量 (m^3)	0.03	Oil capacity (L)	0.03
包装尺寸（mm）	3250*1100*2300	Overall machine size (mm)	3250*1100*2300
履带接地长度（mm）	1200	Trace ground length (mm)	1200
履带宽度（mm）	180	Trace width (mm)	180
挖掘最大深度（mm）	1800	Max maximum depth (mm)	1800
卸载最大高度（mm）	1850	Unload maximum height (mm)	1850
挖掘最大高度（mm）	2680	Excavmaximum height (mm)	2680
爬坡能力	30°	Climbing capacity	30°
行走速度（km/h）	0-3	Walking speed (km/h)	0-3
铲斗挖掘力（kn）	16	Bucket excavation force (kn)	16

细节展示/Details presentation


复合式操作台
Compound operation console


品牌发动机
Brand engine


行走马达
Walking motor

挖掘机系列
Excavator Series
ME18-1



性能特点/CHARACTERISTIC

- 采用优质品牌发动机，性能稳定，油耗低
  Using high-quality brand engines, the performance is stable and the fuel consumption is low.
- 机身小巧，操作灵活，适用于各种狭窄空间作业
  The body is compact and the operation is flexible, making it suitable for various operations in narrow spaces.
- 采用优质碳钢，打砂喷塑工艺，漆面更牢固，不易上锈
  Using high-quality carbon steel and sandblasting and powder coating techniques, the paint surface is more durable and less prone to rusting.
- 操作简单易学，动作精准可控
  The operation is simple and easy to learn, with precise and controllable movements.

产品展示/Product display








产品用途/Product application

适用于山地开荒、市政工程、园林绿化、埋设水电、果园挖沟除草，农村下水道清淤等。
It is suitable for mountain land reclamation, municipal engineering, landscaping, water and electricity installation, orchard ditch digging and weeding, rural sewer dredging, etc.

选装配置/Optional equipment

发动机可选配：久保田D902、洋马374
The engine options available are: Kubota D902 and Yanmar 374.

配置可选：驾驶室、大臂侧摆、底盘伸缩
Optional configurations: driver's cab, large arm side swing, chassis extension and retraction

发动机型号	久保田D722	Engine type	Kubota D722
动力种类	立式/水冷/四冲程	Power types	vertical, water-cooled, four-stroke
排量（L）	0.719	Displacement (L)	0.719
最大功率（kw/rpm）	14.9/3600	Rated power (kw / rpm)	14.9/3600
马力（HP）	20.3	Horsepower (HP)	20.3
燃油种类	柴油	Fuel types	Diesel oil
机油容量 (L)	5	Fuel consumption (g / kwh)	5
操作重量 (kg)	1800	Fuel Fuel Capacity (L)	1800
铲斗容量（m^3）	0.05	Oil capacity (L)	0.05
整机尺寸（mm）	3250*1100*2300	Overall machine size (mm)	3250*1100*2300
履带接地长度（mm）	1300	Trace ground length (mm)	1300
履带宽度（mm）	180	Trace width (mm)	180
挖掘最大深度（mm）	1800	Max maximum depth (mm)	1800
卸载最大高度（mm）	2300	Unload maximum height (mm)	2300
挖掘最大高度（mm）	3200	Excavmaximum height (mm)	3200
爬坡能力	32°	Climbing capacity	32°
行走速度（km/h）	0-3	Walking speed (km/h)	0-3
铲斗挖掘力（kn）	18	Bucket excavation force (kn)	18

细节展示/Details presentation


液压先导操作
Hydraulic pilot operation


品牌发动机
Brand engine


行走马达
Walking motor

挖掘机系列
Excavator Series
ME18-2



性能特点/CHARACTERISTIC

- 采用优质品牌发动机，性能稳定，油耗低
  Using high-quality brand engines, the performance is stable and the fuel consumption is low.
- 机身小巧，操作灵活，适用于各种狭窄空间作业
  The body is compact and the operation is flexible, making it suitable for various operations in narrow spaces.
- 采用优质碳钢，打砂喷塑工艺，漆面更牢固，不易上锈
  Using high-quality carbon steel and sandblasting and powder coating techniques, the paint surface is more durable and less prone to rusting.
- 操作简单易学，动作精准可控
  The operation is simple and easy to learn, with precise and controllable movements.

产品展示/Product display








产品用途/Product application

适用于山地开荒、市政工程、园林绿化、埋设水电、果园挖沟除草，农村下水道清淤等。
It is suitable for mountain land reclamation, municipal engineering, landscaping, water and electricity installation, orchard ditch digging and weeding, rural sewer dredging, etc.

选装配置/Optional equipment

发动机可选配：久保田D902
The engine options available are: Kubota D902

配置可选：驾驶室、大臂侧摆、底盘伸缩
Optional configurations: driver's cab, large arm side swing, chassis extension and retraction

发动机型号	莱动385	Engine Model	Laidong 385
整机尺寸(mm)	3200*1200*2350	Overall Dimensions (mm)	3200*1200*2350
操作重量(kg)	1230	Operating weight (kg)	1230
额定功率(kw)	29	Rated Power (kW)	29
铲斗容量 (m^3)	0.03	Bucket Capacity (m^3)	0.03
最大挖掘高度(mm)	2420	Max. Digging Height (mm)	2420
最大卸载高度(mm)	1650	Max. Dumping Height (mm)	1650
最大挖掘深度(mm)	1780	Max. Digging Depth (mm)	1780
最大挖掘半径(mm)	3100	Max. Digging Radius (mm)	3100
铲斗宽度(mm)	350	Bucket Width (mm)	350
行走马达	锐力/力顿	Travel Motor	Ruili / Lidun
行走速度(km/h)	0-1.8	Travel Speed (km/h)	0-1.8
回转马达	锐力/力顿	Slewing Motor	Ruili / Lidun
回转速度(rpm)	10r/min	Slewing Speed (rpm)	10r/min
履带长度(mm)	1400	Track Length (mm)	1400
履带宽度(mm)	200	Track Width (mm)	200
燃油箱(L)	9.5	Fuel Tank Capacity (L)	9.5
液压油箱(L)	11	Hydraulic Tank Capacity (L)	11

细节展示/Details presentation


液压先导操作
Hydraulic pilot operation


品牌发动机
Brand engine


行走马达
Walking motor

挖掘机系列
Excavator Series
ME20



性能特点/CHARACTERISTIC

- 采用优质品牌发动机，性能稳定，油耗低
  Using high-quality brand engines, the performance is stable and the fuel consumption is low.
- 机身小巧，操作灵活，适用于各种狭窄空间作业
  The body is compact and the operation is flexible, making it suitable for various operations in narrow spaces.
- 采用优质碳钢，打砂喷塑工艺，漆面更牢固，不易上锈
  Using high-quality carbon steel and sandblasting and powder coating techniques, the paint surface is more durable and less prone to rusting.
- 操作简单易学，动作精准可控
  The operation is simple and easy to learn, with precise and controllable movements.

产品展示/Product display








产品用途/Product application

适用于山地开荒、市政工程、园林绿化、埋设水电、农村下水道清淤等。
It is suitable for mountain land reclamation, municipal engineering, landscaping, water and electricity installation, rural sewer dredging, etc.

选装配置/Optional equipment

发动机可选配：久保田D902
Engine optional: Kubota D902
配置可选：驾驶室、大臂侧摆、底盘伸缩
Optional configurations: cab, boom side swing, chassis extension and retraction

发动机型号	莱动385	Engine type	Laidong 385
动力种类	立式/水冷/四冲程	Power types	vertical, water-cooled, four-stroke
排量（L）	1.6	Displacement (L)	1.6
额定功率（kw/rpm）	29	Rated power (kw / rpm)	29
马力（HP）	20.3	Horsepower (HP)	20.3
燃油种类	柴油	Fuel types	Diesel oil
机油容量 (L)	3.8	Fuel consumption (g / kwh)	3.8
操作重量 (kg)	2000	Fuel Fuel Capacity (L)	2000
铲斗容量（m^3）	0.05	Oil capacity (L)	0.05
整机尺寸（mm）	3250*1200*2350	Overall machine size (mm)	3250*1200*2350
履带接地长度（mm）	1300	Trace ground length (mm)	1300
履带宽度（mm）	200	Trace width (mm)	200
挖掘最大深度（mm）	2200	Max maximum depth (mm)	2200
卸载最大高度（mm）	2300	Unload maximum height (mm)	2300
挖掘最大高度（mm）	3200	Excavmaximum height (mm)	3200
爬坡能力	30°	Climbing capacity	30°
行走速度（km/h）	0-3	Walking speed (km/h)	0-3
铲斗挖掘力（kn）	20	Bucket excavation force (kn)	20

细节展示/Details presentation


液压先导操作
Hydraulic pilot operation


品牌发动机
Brand engine


行走马达
Walking motor

挖掘机系列
Excavator Series
ME22



性能特点/CHARACTERISTIC

- 采用优质品牌发动机，性能稳定，油耗低
  Using high-quality brand engines, the performance is stable and the fuel consumption is low.
- 机身小巧，操作灵活，适用于各种狭窄空间作业
  The body is compact and the operation is flexible, making it suitable for various operations in narrow spaces.
- 采用优质碳钢，打砂喷塑工艺，漆面更牢固，不易上锈
  Using high-quality carbon steel and sandblasting and powder coating techniques, the paint surface is more durable and less prone to rusting.
- 操作简单易学，动作精准可控
  The operation is simple and easy to learn, with precise and controllable movements.

产品展示/Product display













产品用途/Product application

适用于山地开荒、市政工程、园林绿化、埋设水电、农村下水道清淤等。

It is suitable for mountain land reclamation, municipal engineering, landscaping, water and electricity installation, rural sewer dredging, etc.

选装配置/Optional equipment

发动机可选配：久保田D1105、莱动385（国二）、莱动385（欧五）

The engine options available are: Kubota D1105, LaiDong 385 (National II), LaiDong 385 (Euro V).

配置可选：驾驶室、大臂侧摆、底盘伸缩

Optional configurations: cab, boom side swing, chassis extension and retraction

发动机型号	久保田D902	Engine type	Kubota D902
动力种类	立式/水冷/四冲程	Power types	vertical, water-cooled, four-stroke
排量（L）	0.719	Displacement (L)	0.719
额定功率（kw/rpm）	11.8	Rated power (kw / rpm)	11.8
马力（HP）	20.3	Horsepower (HP)	20.3
燃油种类	柴油	Fuel types	Diesel oil
机油容量 (L)	3.8	Fuel consumption (g / kwh)	3.8
操作重量 (kg)	2000	Fuel Fuel Capacity (L)	2000
铲斗容量（m^3）	0.05	Oil capacity (L)	0.05
整机尺寸（mm）	3250*1300*2400	Overall machine size (mm)	3250*1300*2400
履带接地长度（mm）	1700	Trace ground length (mm)	1700
履带宽度（mm）	230	Trace width (mm)	230
挖掘最大深度（mm）	2200	Max maximum depth (mm)	2200
卸载最大高度（mm）	2300	Unload maximum height (mm)	2300
挖掘最大高度（mm）	3200	Excavmaximum height (mm)	3200
爬坡能力	30°	Climbing capacity	30°
行走速度（km/h）	0-3	Walking speed (km/h)	0-3
铲斗挖掘力（kn）	20	Bucket excavation force (kn)	20

细节展示/Details presentation



液压先导操作
Hydraulic pilot operation



品牌发动机
Brand engine



行走马达
Walking motor

挖掘机系列
Excavator Series

ME25



性能特点/CHARACTERISTIC

- 采用优质品牌发动机，性能稳定，油耗低
  Using high-quality brand engines, the performance is stable and the fuel consumption is low.
- 机身小巧，操作灵活，适用于各种狭窄空间作业
  The body is compact and the operation is flexible, making it suitable for various operations in narrow spaces.
- 采用优质碳钢，打砂喷塑工艺，漆面更牢固，不易上锈
  Using high-quality carbon steel and sandblasting and powder coating techniques, the paint surface is more durable and less prone to rusting.
- 操作简单易学，动作精准可控
  The operation is simple and easy to learn, with precise and controllable movements.

产品展示/Product display








产品用途/Product application

适用于山地开荒、市政工程、园林绿化、埋设水电、农村下水道清淤等。

It is suitable for mountain land reclamation, municipal engineering, landscaping, water and electricity installation, rural sewer dredging, etc.

选装配置/Optional equipment

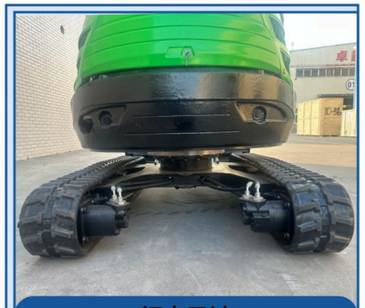
发动机可选配：久保田D1105
Engine optional: Kubota D1105
配置可选：大臂侧摆、底盘伸缩
Optional configuration: Side swing of the boom, Pneumatic extension of the chassis

发动机型号	久保田D902	Engine type	Kubota D902
动力种类	立式/水冷/四冲程	Power types	vertical, water-cooled, four-stroke
排量（L）	0.89	Displacement (L)	0.89
额定功率（kw/rpm）	11.8	Rated power (kw / rpm)	11.8
马力（HP）	20.3	Horsepower (HP)	20.3
燃油种类	柴油	Fuel types	Diesel oil
机油容量 (L)	3.8	Fuel consumption (g / kwh)	3.8
操作重量 (kg)	2000	Fuel Fuel Capacity (L)	2000
铲斗容量（m^3）	0.05	Oil capacity (L)	0.05
整机尺寸（mm）	3250*1300*2400	Overall machine size (mm)	3250*1300*2400
履带接地长度（mm）	1700	Trace ground length (mm)	1700
履带宽度（mm）	230	Trace width (mm)	230
挖掘最大深度（mm）	2200	Max maximum depth (mm)	2200
卸载最大高度（mm）	2300	Unload maximum height (mm)	2300
挖掘最大高度（mm）	3200	Excavmaximum height (mm)	3200
爬坡能力	30°	Climbing capacity	30°
行走速度（km/h）	0-3	Walking speed (km/h)	0-3
铲斗挖掘力（kn）	20	Bucket excavation force (kn)	20

细节展示/Details presentation


液压先导操作
Hydraulic pilot operation


品牌发动机
Brand engine


行走马达
Walking motor

挖掘机系列
Excavator Series

ME30



性能特点/CHARACTERISTIC

- 采用优质品牌发动机，性能稳定，油耗低
  Using high-quality brand engines, the performance is stable and the fuel consumption is low.
- 机身小巧，操作灵活，适用于各种狭窄空间作业
  The body is compact and the operation is flexible, making it suitable for various operations in narrow spaces.
- 采用优质碳钢，打砂喷塑工艺，漆面更牢固，不易上锈
  Using high-quality carbon steel and sandblasting and powder coating techniques, the paint surface is more durable and less prone to rusting.
- 操作简单易学，动作精准可控
  The operation is simple and easy to learn, with precise and controllable movements.

产品展示/Product display








产品用途/Product application

适用于市政工程、园林绿化、山地开荒、拆迁破碎、管道挖掘等。

It is applicable to municipal engineering, landscaping, mountain land reclamation, demolition and crushing, pipeline excavation, etc.

选装配置/Optional equipment

发动机可选配：莱动385（欧五）
Engine options available:Laodong 385 (Euro V)
配置可选：顶棚、底盘伸缩、高低速、内置马达；
Optional configurations: ceiling， boom side swing, chassis extension and retraction

发动机型号	莱动385	Engine Model	Laidong 385
整机尺寸(mm)	3315*1400*240	Overall Dimensions (mm)	3315*1400*2400
总重量(kg)	1850	Operating Weight (kg)	1850
额定功率(kw)	29	Rated Power (kW)	29
铲斗容量 (m^3)	0.03	Bucket Capacity (m^3)	0.03
最大挖掘高度(mm)	2430	Max. Digging Height (mm)	2430
最大卸载高度(mm)	1570	Max. Dumping Height (mm)	1570
最大挖掘深度(mm)	2375	Max. Digging Depth (mm)	2375
最大挖掘半径(mm)	3660	Max. Digging Radius (mm)	3660
铲斗宽度(mm)	500	Bucket Width (mm)	500
行走马达	锐力/力顿	Travel Motor	Ruili / Lidun
行走速度(km/h)	0-1.8	Travel Speed (km/h)	0-1.8
回转马达	锐力/力顿	Slewing Motor	Ruili / Lidun
回转速度(rpm)	8r/min	Slewing Speed (rpm)	8r/min
履带接地长度(mm)	1700	Track Ground Contact Length (mm)	1700
履带宽度(mm)	230	Track Width (mm)	230
燃油箱(L)	21	Fuel Tank Capacity (L)	21
液压油箱(L)	21	Hydraulic Tank Capacity (L)	21

细节展示/Details presentation


液压先导操作
Hydraulic pilot operation


品牌发动机
Brand engine



行走马达
Walking motor

挖掘机系列
Excavator Series

ME35



性能特点/CHARACTERISTIC

- 采用优质品牌发动机，性能稳定，油耗低
  Using high-quality brand engines, the performance is stable and the fuel consumption is low.
- 机身小巧，操作灵活，适用于各种狭窄空间作业
  The body is compact and the operation is flexible, making it suitable for various operations in narrow spaces.
- 采用优质碳钢，打砂喷塑工艺，漆面更牢固，不易上锈
  Using high-quality carbon steel and sandblasting and powder coating techniques, the paint surface is more durable and less prone to rusting.
- 操作简单易学，动作精准可控
  The operation is simple and easy to learn, with precise and controllable movements.

产品展示/Product display













产品用途/Product application

适用于市政工程、园林绿化、山地开荒、拆迁破碎、管道挖掘等。
It is applicable to municipal engineering, landscaping, mountain land reclamation, demolition and crushing, pipeline excavation, etc.

选装配置/Optional equipment

配置可选：驾驶室、底盘伸缩
Optional configuration: Cab, chassis telescopic extension

主机性能参数			外形尺寸参数		
发动机品牌:	Engine Brand	Yammar-3TNY80F	整机工作重量(kg)	Operating Weight of Machine (kg)	2550
行走速度 低/高速(Km/h)	Travel Speed Low/High (km/h)	0-1.8	A 最大挖掘高度(mm)	A Maximum Digging Height (mm)	4155
爬坡能力(%):	Gradeability (%)	15	B 最大卸载高度(mm)	B Maximum Dumping Height (mm)	2840
侧摆角度（左/右）	Side Swing Angle (Left/Right)	45°	C 最大挖掘深度(mm)	C Maximum Digging Depth (mm)	2456
最大功率(Kw)	Maximum Power (kW)	14.6	E 最大挖掘半径(mm)	E Maximum Digging Radius (mm)	4520
最大转速(rpm)	Maximum Rotational Speed (rpm)	2400	J 总长(mm)	J Overall Length (mm)	4077
缸数:	Number of Cylinders	3	K 总宽(mm)	K Overall Width (mm)	1500
冷却方式:	Cooling Method	水冷	L 总高(mm)	L Overall Height (mm)	2450
发动机油更换量(L)	Engine Oil Capacity for Replacement (L)	1.1	推土铲宽/高(mm)	Bulldozer Blade Width/Height (mm)	1500/318
燃料形式:	Fuel Type	柴油	带宽*节距*节数	Track Width × Pitch × Number of Links	230*90*43
燃油标号:	Fuel Grade	5号/-0	铲斗容量(m^3)	Bucket Capacity (m^3)	0.068
理论油耗(L/h)	Theoretical Fuel Consumption (L/h)	0.5-1.2			
额定设定压力(Mpa)	Rated Set Pressure (MPa)	24.5			
主泵最大流量(L/min)	Maximum Flow Rate of Main Pump (L/min)	32			
燃油箱(L):	Fuel Tank Capacity (L)	31.5			
液压油箱（L）	Hydraulic Oil Tank Capacity (L)	29			

细节展示/Details presentation



液压先导操作
Hydraulic pilot operation



品牌发动机
Brand engine



行走马达
Walking motor

挖掘机系列
Excavator Series

ME40



性能特点/CHARACTERISTIC

- 采用优质品牌发动机，性能稳定，油耗低
  Using high-quality brand engines, the performance is stable and the fuel consumption is low.
- 机身小巧，操作灵活，适用于各种狭窄空间作业
  The body is compact and the operation is flexible, making it suitable for various operations in narrow spaces.
- 采用优质碳钢，打砂喷塑工艺，漆面更牢固，不易上锈
  Using high-quality carbon steel and sandblasting and powder coating techniques, the paint surface is more durable and less prone to rusting.
- 操作简单易学，动作精准可控
  The operation is simple and easy to learn, with precise and controllable movements.

产品展示/Product display








产品用途/Product application

适用于室内装修破碎、果园挖沟除草，大棚翻土种植、农村下水道清淤等。

Suitable for indoor decoration demolition, orchard ditch excavation and weed removal, greenhouse soil turning for planting, and rural sewerage dredging, etc.

详细参数/Detailed parameters

发动机品牌	久保田	Engine Brand	Kubota
发动机型号	D1703	Engine Model	D1703
主泵品牌	伊顿-丹弗斯	Main Pump Brand	Eaton-Danfoss
主泵类型/型号	TFA10VO28LADS/53R -VSC12N00	Main Pump Type/Model	TFA10VO28LADS/53R -VSC12N00
行走马达品牌	伊顿-丹弗斯	Travel Motor Brand	Eaton-Danfoss
多路阀	10联多路阀	Multi-way Valve	10-Section Multi-way Valve
多路阀品牌	伊顿-丹弗斯	Multi-way Valve Brand	Eaton-Danfoss
液压油箱(L)	29	Hydraulic Oil Tank (L)	29
整机工作重量（Kg)	2550	Machine Operating Weight (kg)	2550
整机尺寸（mm）	4077*1500*2450	Overall Machine Dimensions (mm)	4077*1500*2450
燃料形式	柴油	Fuel Type	Diesel Oil
行走速度（km/h）	0-1.8	Travel Speed (km/h)	0-1.8
最大转速(rpm)	2400	Maximum Rotational Speed (rpm)	2400
最大挖掘半径(mm)	4520	Maximum Digging Radius (mm)	4520
最大挖掘深度(mm)	2456	Maximum Digging Depth (mm)	2456
最大挖掘高度(mm)	4155	Maximum Digging Height (mm)	4155
最大卸载高度A(mm)	2840	Maximum Dumping Height A (mm)	2840
推土铲宽高(mm)	1500/318	Bulldozer Blade Width and Height(mm)	1500/318
燃油箱(L)	31.5	Fuel Tank (L)	31.5

细节展示/Details presentation



复合式操作台
Compound operation console



品牌发动机
Brand engine



行走马达
Walking motor

挖掘机系列
Excavator Series

XZ12



性能特点/CHARACTERISTIC

- 采用优质品牌发动机，性能稳定，油耗低
  Using high-quality brand engines, the performance is stable and the fuel consumption is low.
- 机身小巧，操作灵活，适用于各种狭窄空间作业
  The body is compact and the operation is flexible, making it suitable for various operations in narrow spaces.
- 采用优质碳钢，打砂喷塑工艺，漆面更牢固，不易上锈
  Using high-quality carbon steel and sandblasting and powder coating techniques, the paint surface is more durable and less prone to rusting.
- 操作简单易学，动作精准可控
  The operation is simple and easy to learn, with precise and controllable movements.

产品展示/Product display








产品用途/Product application

适用于山地开荒、室内装修破碎、果园挖沟除草，大棚翻土种植、农村下水道清淤等。
It is suitable for mountain land reclamation, indoor decoration demolition, orchard ditch digging and weeding, greenhouse soil turning and planting, rural sewer dredging, etc.

选装配置/Optional equipment

发动机可选配：优普192（国二）
Engine optional:youpmot 192 (China II)
配置可选：四腿棚、驾驶室、大臂侧摆、底盘伸缩
Optional configurations: four legged shed, driver's cab, large arm side swing, chassis extension and retraction

发动机型号	科普192	Engine Model	KOOP192
动力种类	柴油/风冷	Power Type	Diesel / Air-cooled
总重量(kg)	680	Operating Weight (kg)	680
行走速度（km/h）	0-2	Travel Speed (km/h)	0-2
铲斗容量 (m^3)	0.02	Bucket Capacity (m^3)	0.02
最大挖掘高度(mm)	2260	Max. Digging Height (mm)	2260
最大卸载高度(mm)	1150	Max. Dumping Height (mm)	1150
最大挖掘深度(mm)	1700	Max. Digging Depth (mm)	1700
最大挖掘半径(mm)	2900	Max. Digging Radius (mm)	2900
推土铲宽度(mm)	920	Blade Width (mm)	920
最大功率(kw)	7.5	Max. Power (kW)	7.5
最大转速(rpm)	3000	Max. Speed (rpm)	3000
主泵类型/型号	齿轮泵	Main Pump Type/Model	Gear Pump
主泵品牌	天津天机	Main Pump Brand	Tianjin Travel Pump
多路阀	8联机械阀	Main Control Valve	8-spool
行走马达	派一	Travel Motor	Paiyi
橡胶履带(cm)	180*72*37	Rubber Track (cm)	180*72*37
燃油箱(L)	5.5	Fuel Tank Capacity (L)	5.5
液压油箱(L)	8	Hydraulic Tank Capacity (L)	8

细节展示/Details presentation


复合式操作台
Compound operation console


品牌发动机
Brand engine


行走马达
Walking motor

挖掘机系列
Excavator Series

XZ18



性能特点/CHARACTERISTIC

- 采用优质品牌发动机，性能稳定，油耗低
  Using high-quality brand engines, the performance is stable and the fuel consumption is low.
- 机身小巧，操作灵活，适用于各种狭窄空间作业
  The body is compact and the operation is flexible, making it suitable for various operations in narrow spaces.
- 采用优质碳钢，打砂喷塑工艺，漆面更牢固，不易上锈
  Using high-quality carbon steel and sandblasting and powder coating techniques, the paint surface is more durable and less prone to rusting.
- 操作简单易学，动作精准可控
  The operation is simple and easy to learn, with precise and controllable movements.

产品展示/Product display





产品用途/Product application

适用于山地开荒、市政工程、园林绿化、挖沟除草，大棚翻土种植、畜牧养殖，农场修整等。
Suitable for mountain land reclamation, municipal engineering, landscaping, ditch excavation and weed removal, soil turning for greenhouse cultivation, livestock breeding, and farm maintenance, etc.

选装配置/Optional equipment

发动机可选配：久保田D722、科普192（欧五）、百力通25T2
Engine optional:Kubota D722、 Koop 192 (Euro V), Briggs&Stratton 25T2
配置可选：驾驶室、大臂侧摆、底盘伸缩
Optional configurations: Cab, boom lateral movement, chassis telescopic extension

发动机型号	科普192F	Engine type	KOOP 192F
动力种类	单缸/四冲程/风冷/立式	Power types	Single-cylinder, four-stroke, air-cooled, vertical
排量（L）	0.499	Displacement (L)	0.499
额定功率（kw/rpm）	7.6/3000	Rated power (kw / rpm)	7.6/3000
马力（HP）	10.3	Horsepower (HP)	10.3
燃油种类	柴油	Fuel types	Diesel oil
油耗（g/kwh）	275	Fuel consumption (g / kwh)	275
燃油容量 (L)	5.5	Fuel Fuel Capacity (L)	5.5
机油容量 (L)	1.65	Oil capacity (L)	1.65
整机尺寸（mm）	2870*1100*2300	Overall machine size (mm)	2870*1100*2300
履带接地长度（mm）	1200	Trace ground length (mm)	1200
履带宽度（mm）	180	Trace width (mm)	180
挖掘最大深度（mm）	180	Max maximum depth (mm)	180
卸载最大高度（mm）	1745	Unload maximum height (mm)	1745
挖掘最大高度（mm）	2580	Excavmaximum height (mm)	2580
爬坡能力	30°	Climbing capacity	30°
行走速度（km/h）	0-2.5	Walking speed (km/h)	0-2.5
铲斗挖掘力（kn）	11.5	Bucket excavation force (kn)	11.5

细节展示/Details presentation


液压先导操作
Hydraulic pilot operation


品牌发动机
Brand engine


行走马达
Walking motor

挖掘机系列
Excavator Series

QX20



性能特点/CHARACTERISTIC

- 采用优质品牌发动机，性能稳定，油耗低
  Using high-quality brand engines, the performance is stable and the fuel consumption is low.
- 机身小巧，操作灵活，适用于各种狭窄空间作业
  The body is compact and the operation is flexible, making it suitable for various operations in narrow spaces.
- 采用优质碳钢，打砂喷塑工艺，漆面更牢固，不易上锈
  Using high-quality carbon steel and sandblasting and powder coating techniques, the paint surface is more durable and less prone to rusting.
- 操作简单易学，动作精准可控
  The operation is simple and easy to learn, with precise and controllable movements.

产品展示/Product display













产品用途/Product application

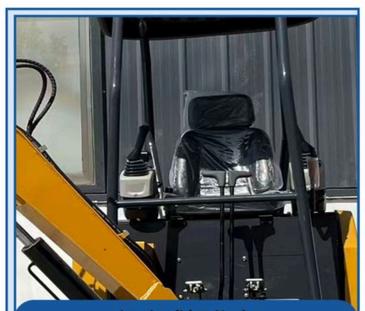
适用于山地开荒、市政工程、园林绿化、埋设水电、农村下水道清淤等。
It is suitable for mountain land reclamation, municipal engineering, landscaping, water and electricity installation, rural sewer dredging, etc.

选装配置/Optional equipment

发动机可选配：久保田D1105、莱动385（欧五）
Engine options available: Kubota D1105, Laodeng 385 (Euro V)
配置可选：驾驶室、大臂侧摆、底盘伸缩
Optional configurations: cab, boom side swing, chassis extension and retraction

整机工作重量(Kg)	1400	Operating Weight(Kg)	1400
发动机品牌	久保田	Engine Brand	Kubota
发动机型号	D902	Engine Model	D902
主泵品牌	天津行走	Main Pump Brand	Tianjin Travel
多路阀	8联多路阀	Main Control Valve (MCV)	8-section multi-way valve
额定设定压力(Mpa)	18.5	Rated Setting Pressure (MPa)	18.5
行走速度	0-1.8	Travel Speed	0-1.8
整机尺寸	3584*1126*2450	Overall Dimensions	3584*1126*2450
燃料形式	柴油	Fuel Type	diesel oil
主泵类型/型号	PGP5123GLP	Main Pump Type/Model	PGP5123GLP
行走马达品牌	科恩-力源	Travel Motor Brand	Korn-Liyuan
多路阀品牌	泰恒	Main Control Valve Brand	Taiheng
液压油箱(L)	14	Hydraulic Tank Capacity (L)	14
最大挖掘高度（mm）	2540	Maximum Digging Height (mm)	2540
最大卸载高度（mm）	1876	Maximum Dumping Height (mm)	1876
最大挖掘深度（mm）	2260	Maximum Digging Depth (mm)	2260
最大挖掘半径（mm）	3695	Maximum Digging Radius (mm)	3695
推土铲宽高（mm）	907/200	Bulldozer Blade Width & Height (mm)	907/200
最大转速(rpm)	3200	Maximum Rotating Speed(rpm)	3200
燃油箱(L)	13	Fuel Tank Capacity (L)	13

细节展示/Details presentation



复合式操作台
Compound operation console



品牌发动机
Brand engine



行走马达
Walking motor

挖掘机系列
Excavator Series

QXL30



性能特点/CHARACTERISTIC

- 采用优质品牌发动机，性能稳定，油耗低
  Using high-quality brand engines, the performance is stable and the fuel consumption is low.
- 机身小巧，操作灵活，适用于各种狭窄空间作业
  The body is compact and the operation is flexible, making it suitable for various operations in narrow spaces.
- 采用优质碳钢，打砂喷塑工艺，漆面更牢固，不易上锈
  Using high-quality carbon steel and sandblasting and powder coating techniques, the paint surface is more durable and less prone to rusting.
- 操作简单易学，动作精准可控
  The operation is simple and easy to learn, with precise and controllable movements.

产品展示/Product display








产品用途/Product application

适用于市政工程、园林绿化、山地开荒、拆迁破碎、管道挖掘等。
It is applicable to municipal engineering, landscaping, mountain land reclamation, demolition and crushing, pipeline excavation, etc.

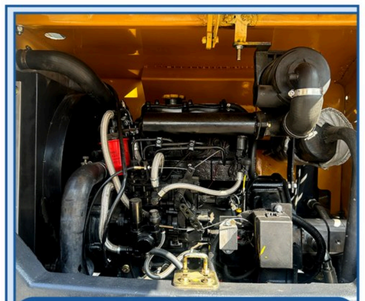
选装配置/Optional equipment

发动机可选配：莱动385（欧五）
Engine optional: Laidong 385 (Euro V)

发动机型号	莱动385	Engine Model	Laidong 385
整机尺寸(mm)	4255*1550*266	Overall Dimensions (mm)	4255*1550*2665
铲斗容积(m^3)	0.05	Bucket Volume (m^3)	0.05
行走速度(km/h)	0-15	Travel Speed (km/h)	0-15
额定压力(Mpa)	18	Rated Pressure (MPa)	18
爬坡能力(°)	30	Gradeability (°)	30
总重量(kg)	1900	Operating Weight (kg)	1900
行走方式	轮式	Travel Mode	Wheel-type
功率(kw)	19	Power (kW)	19
燃油箱(L)	21	Fuel Tank Capacity (L)	21
液压油箱(L)	21	Hydraulic Oil Tank Capacity (L)	21
散热量(L)	120	Heat Dissipation (L)	120
最大挖掘高度(mm)	3860	Maximum Digging Height (mm)	3860
最大挖掘深度(mm)	2350	Digging Depth (mm)	2350
最大挖掘半径(mm)	4280	Maximum Digging Radius (mm)	4280

细节展示/Details presentation


液压先导操作
Hydraulic pilot operation


品牌发动机
Brand engine



耐磨轮胎
Wear-resistant tires

小象重工集团
MINI ELEPHANT HEAVY INDUSTRY GROUP

02

装载机系列

Loader series





装载机系列
Loader series

ME280

性能特点/CHARACTERISTIC

- 机动性能强
  Excellent maneuverability
- 工作效率高
  High working efficiency
- 使用成本低
  Low operating cost
- 适用场景广
  Wide range of applicable scenarios

产品参数/Product parameters

主机性能参数		
发动机品	Engine Brand	润通-Runtong
发动机型号	发动机型号/Engine Model	420
最大功率 (Kw)	Maximum Power (Kw)	8.5
气缸数	Number of Cylinders	1
最大马力(ps)	Maximum Horsepower (ps)	11.5
最大转速 (r/min)	Maximum Rotating Speed (r/min)	3600
排量 (cc)	Displacement (cc)	420
冷却方式	Cooling Method	风冷
燃料类型	Fuel Type	92汽油 92-octane gasoline
液压压力	Hydraulic Pressure	22Mpa
循环时间 (s)	Cycle Time (s)	上升：1；下降：1 Lifting: 1; Lowering: 1
载重(kg)	Load Capacity (kg)	500
铲斗容量	Bucket Capacity	0.15
速度	Speed	0-6km /h
工作重量	Operating Weight	200
液压泵流量	Hydraulic Pump Flow Rate	75.6L
液压箱容量(L)	Hydraulic Tank Capacity (L)	12
燃油箱容量(L)	Fuel Tank Capacity (L)	5
多路阀	Multi-way Valve	3+2手动
行走速度	Travel Speed	0-6km /h

外形尺寸参数		
最大工作高度 (A)	Maximum Working Height (A)	2350mm
最大销轴高度(B)	Maximum Pin Height (B)	1800mm
最大卸载高度 (C)	Maximum Dumping Height (C)	1700mm
最大举升重量	Maximum Lifting Capacity	200kg
最高点卸料距离(D)	Maximum Dumping Reach at Peak Height (D)	680mm
铲斗摆动角度 (β)	Bucket Swing Angle (β)	120
铲斗卸料角度 (γ)	Bucket Dumping Angle (γ)	30
铲斗容量	Bucket Capacity	0.15
总高 (H)	Overall Height (H)	1200mm
离地高度 (F)	Ground Clearance (F)	1200mm
总宽 (W)	Overall Width (W)	1000mm
铲斗宽度 (K)	Bucket Width (K)	920mm
总长 (L)(含铲斗)	Overall Length (L) (Including Bucket)	2150mm
转弯半径 (R)	Turning Radius (R)	原地-Stay in place
橡胶履带	Rubber Track	150*72*34cm
总重量	Total Weight	550kg







装载机系列
Loader series

ME275

性能特点/CHARACTERISTIC

- 机动性能强
  Excellent maneuverability
- 工作效率高
  High working efficiency
- 使用成本低
  Low operating cost
- 适用场景广
  Wide range of applicable scenarios



产品参数/Product parameters

整机工作重量(Kg)	520	Machine Operating Weight(Kg)	520
发动机品牌	润通	Engine Brand	Run Tong
发动机型号	420	Engine Model	420
行走速度(Km/h)	0-6	Travel Speed(Km/h)	0-6
铲斗容量(m^3)	0.15	Bucket Capacity(m^3)	0.15
整机尺寸(mm)	2050*1000*1980	Overall Machine Dimensions(mm)	2050*1000*1980
燃料形式	汽油92#	Fuel Type	92-octane gasoline
液压油箱(L)	10	Hydraulic Oil Tank (L)	10
燃油箱(L)	5	Fuel Tank (L)	5
最大工作高度(mm)	1600	Maximum Working Height (mm)	1600
最大举升重量(Kg)	200	Maximum Lifting Weight (Kg)	200
发动机最大功率(Kw)	8.5	Maximum Engine Power(Kw)	8.5
发动机油更换量(L)	1	Engine Oil Replacement Capacity (L)	1
轮胎	橡胶履带	Tire	rubber track









装载机系列
Loader series

ME290-履带

性能特点/CHARACTERISTIC

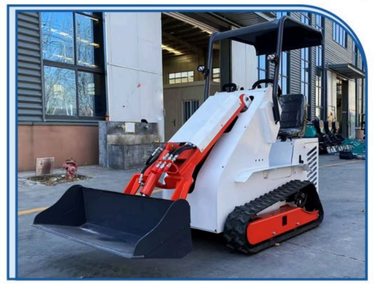
- 机动性能强
  Excellent maneuverability
- 工作效率高
  High working efficiency
- 使用成本低
  Low operating cost
- 适用场景广
  Wide range of applicable scenarios

产品参数/Product parameters

发动机型号与品牌	润通420	Engine model and brand	Runtong 420
最大马力(ps)	11.5	Maximum horsepower (ps)	11.5
最大功率(Kw)	8.5	Maximum power (Kw)	8.5
最大转速(rpm)	3600	Maximum speed (rpm)	3600
主泵类型/型号	06+06齿轮泵	Main pump type/model	06+06 Gear Pump
主泵品牌	天津行走	Main pump brand	Tianjin Walk
额定设定压力(Mpa)	22	Rated pressure (Mpa)	22
多路阀	两组(3+2)手动阀	Multiway valve	Two Sets of (3+2)Manual Valves
额定设定压力(Mpa)	16	Rated pressure (Mpa)	16
整机工作重量(Kg)	750	Working weight (Kg)	750
铲斗容量(m^3)	0.09	Bucket capacity (m^3)	0.09
行走速度 低/高速(Km/h)	0-6	Low/high speed (Km/h)	0-6
爬坡能力(%)	25	Climbing ability (%)	25
最大举升力(Kg)	200	Maximum lift (Kg)	200
最大工作高度C(mm)	1882	Maximum working height C(mm)	1882
最大卸载高度A(mm)	1520	Max unloading height A(mm)	1520
铲斗卸料角度L	33°	Bucket discharge Angle L	33°
总长度J/K(mm)	2500	Total length J/K(mm)	2500







装载机系列
Loader series

ME290-轮式

性能特点/CHARACTERISTIC

- 机动性能强
  Excellent maneuverability
- 工作效率高
  High working efficiency
- 使用成本低
  Low operating cost
- 适用场景广
  Wide range of applicable scenarios



产品参数/Product parameters

整机工作重量(Kg)	770	Operating Weight(Kg)	770
发动机品牌	润通	Engine Brand	Runtong
发动机型号	420	Engine Model	420
最大马力(ps)	11.56	Maximum Horsepower(ps)	11.56
铲斗容量(m^3)	0.15	Bucket Capacity(m^3)	0.15
整机尺寸(mm)	2542*1106*2100	Overall Dimensions(mm)	2542*1106*2100
燃料形式	汽油	Fuel Type	Gasoline
液压油箱(L)	20	Hydraulic Tank Capacity (L)	20
最大工作高度(mm)	1882	Maximum Working Height (mm)	1882
最大卸载高度(mm)	1520	Maximum Dumping Height (mm)	1520
轴距(mm)	580	Wheelbase (mm)	580
发动机油更换量(L)	3.5	Engine Oil Capacity (L)	3.5
行走方式	轮胎	Travel Mode / Propulsion Type	Tyre









装载机系列
Loader series

ME380-1轮式

性能特点/CHARACTERISTIC

- 机动性能强
  Excellent maneuverability
- 工作效率高
  High working efficiency
- 使用成本低
  Low operating cost
- 适用场景广
  Wide range of applicable scenarios

产品参数/Product parameters

整机工作重量(Kg)	875	Operating Weight(Kg)	875
发动机品牌	润通	Engine Brand	Runtong
发动机型号	R740	Engine Model	R740
最大马力(ps)	24	Maximum Horsepower (ps)	27
多路阀	两组（3+2）手动阀	Multi-way Valve	Two Sets (3+2) Manual Valves
主泵品牌	天津行走	Main Pump Brand	Tianjin Travel
铲斗容量(m^3)	0.15m^3	Main Pump Brand	0.15m^3
整机尺寸(mm)	2055/2285*1090*1270	Overall Dimensions (mm)	2055/2285*1090*1270
燃料形式	汽油92#	Fuel Type	92-octane Gasoline
液压油箱(L)	23	Hydraulic Tank Capacity (L)	23
燃油箱(L)	28	Fuel Tank Capacity (L)	28
多路阀品牌	力信	Multi-way Valve Brand	Lixin
主泵类型/型号	GP51066	Main Pump Type/Model	GP51066
最大工作高度(mm)	2100	Maximum Working Height (mm)	2100
最大卸载高度(mm)	1480	Maximum Dumping Height (mm)	1480
行走形式	轮胎式	Travel Mode	Wheel Type
发动机油更换量(L)	1.6	Engine Oil Capacity (L)	1.6
上车宽度(mm)	810	Upper Frame Width (mm)	810
行走马达品牌	锐力	Travel Motor Brand	Ruili
马达排量	375	Motor Displacement	375







装载机系列
Loader series

ME380-1履带



性能特点/CHARACTERISTIC

- 机动性能强
  Excellent maneuverability
- 工作效率高
  High working efficiency
- 使用成本低
  Low operating cost
- 适用场景广
  Wide range of applicable scenarios

产品参数/Product parameters

整机工作重量(Kg)	875	Operating Weight(Kg)	875
发动机品牌	润通	Engine Brand	Runtong
发动机型号	R740	Engine Model	R740
最大马力(ps)	24	Maximum Horsepower (ps)	27
多路阀	两组（3+2）手动阀	Multi-way Valve	Two Sets (3+2) Manual Valves
主泵品牌	天津行走	Main Pump Brand	Tianjin Travel
铲斗容量(m^3)	0.15m^3	Main Pump Brand	0.15m^3
整机尺寸(mm)	2055/2285*1090*1270	Overall Dimensions (mm)	2055/2285*1090*1270
燃料形式	汽油92#	Fuel Type	92-octane Gasoline
液压油箱 (L)	23	Hydraulic Tank Capacity (L)	23
燃油箱 (L)	28	Fuel Tank Capacity (L)	28
多路阀品牌	力信	Multi-way Valve Brand	Lixin
主泵类型/型号	GP51066	Main Pump Type/Model	GP51066
最大工作高度(mm)	2100	Maximum Working Height (mm)	2100
最大卸载高度(mm)	1480	Maximum Dumping Height (mm)	1480
行走形式	履带式	Travel Mode	Crawler Type
发动机油更换量(L)	1.6	Engine Oil Capacity (L)	1.6
上车宽度(mm)	810	Upper Frame Width (mm)	810
行走马达品牌	锐力	Travel Motor Brand	Ruili
马达排量	375	Motor Displacement	375









装载机系列
Loader series

ME380-2

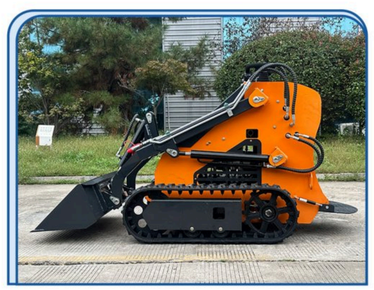
性能特点/CHARACTERISTIC

- 机动性能强
  Excellent maneuverability
- 工作效率高
  High working efficiency
- 使用成本低
  Low operating cost
- 适用场景广
  Wide range of applicable scenarios

产品参数/Product parameters

发动机型号	润通R740	Engine model	Runtong R740
动力种类	单缸/四冲程/风冷/立式	Power type	Single-cylinder/Four-stroke/ Air-cooled/Vertical-type
排量（cc）	739	Displacement (cc)	739
最大功率（kw/rpm）	16.8/3600	Maximum power (kW/rpm)	16.8/3600
马力（HP）	24	Horsepower (HP)	24
燃油种类	汽油	Fuel type	Gasoline
油耗（g/kwh）	370	Fuel consumption (g/kWh)	370
燃油容量 (L)	25	Fuel capacity (L)	25
机油容量 (L)	1.6	Oil capacity (L)	1.6
整机尺寸（mm）	2285*1100*1270	Overall dimensions (mm)	2285*1100*1270
整机重量（kg）	890	Overall weight (kg)	890
额定载荷（kg）	200	Rated load (kg)	200
最大载荷（kg）	375	Maximum load (kg)	375
卸载最大高度（mm）	1880	Maximum unloading height (mm)	1880
液压（mpa）	17	Hydraulic (MPa)	17
爬坡能力	30°	Climbing ability	30°
行走速度（km/h）	0-6	Walking speed (km/h)	0-6
铲斗容量（m^3）	0.15	Bucket capacity (m^3)	0.15







装载机系列
Loader series

ME380-3

性能特点/CHARACTERISTIC

- 机动性能强
  Excellent maneuverability
- 工作效率高
  High working efficiency
- 使用成本低
  Low operating cost
- 适用场景广
  Wide range of applicable scenarios



产品参数/Product parameters

发动机型号	润通R740	Engine model	Runtong R740
动力种类	单缸/四冲程/风冷/立式	Power type	Single-cylinder/Four-stroke/ Air-cooled/Vertical-type
排量（cc）	739	Displacement (cc)	739
最大功率（kw/rpm）	16.8/3600	Maximum power (kW/rpm)	16.8/3600
马力（HP）	24	Horsepower (HP)	24
燃油种类	汽油	Fuel type	Gasoline
油耗（g/kwh）	370	Fuel consumption (g/kWh)	370
燃油容量 (L)	25	Fuel capacity (L)	25
机油容量 (L)	1.6	Oil capacity (L)	1.6
整机尺寸（mm）	2285*1100*1270	Overall dimensions (mm)	2285*1100*1270
整机重量（kg）	890	Overall weight (kg)	890
额定载荷（kg）	200	Rated load (kg)	200
最大载荷（kg）	375	Maximum load (kg)	375
卸载最大高度（mm）	1880	Maximum unloading height (mm)	1880
液压（mpa）	17	Hydraulic (MPa)	17
爬坡能力	30°	Climbing ability	30°
行走速度（km/h）	0-6	Walking speed (km/h)	0-6
铲斗容量（m^3）	0.15	Bucket capacity (m^3)	0.15









装载机系列
Loader series

ME35-轮式

性能特点/CHARACTERISTIC

- 机动性能强
  Excellent maneuverability
- 工作效率高
  High working efficiency
- 使用成本低
  Low operating cost
- 适用场景广
  Wide range of applicable scenarios

产品参数/Product parameters

整机工作重量(Kg)	2400	Operating Weight(Kg)	2400
发动机品牌	润通	Engine Brand	Runtong
发动机型号	825D	Engine Model	825D
最大马力(ps)	32.6	Maximum Horsepower (ps)	32.6
多路阀	5路多路阀	Multi-way Valve	5-way Multi-way Valve
主泵品牌	天津行走	Main Pump Brand	Tianjin Travel
铲斗容量(m^3)	0.18	Main Pump Brand	0.18
整机尺寸(mm)	2660*910*1810	Overall Dimensions (mm)	2660*910*1810
燃料形式	汽油	Fuel Type	Gasoline
液压油箱 (L)	25	Hydraulic Tank Capacity (L)	25
燃油箱 (L)	25	Fuel Tank Capacity (L)	25
多路阀品牌	泰恒	Multi-way Valve Brand	Taiheng
主泵类型/型号	PGP5123GLP	Main Pump Type/Model	PGP5123GLP
最大工作高度(mm)	3019	Maximum Working Height (mm)	3019
最大卸载高度(mm)	1959	Maximum Dumping Height (mm)	1959
行走形式	轮胎式	Travel Mode	Wheel Type
发动机油更换量(L)	2.4	Engine Oil Capacity (L)	2.4
上车宽度(mm)	650	Upper Frame Width (mm)	650
行走马达品牌	锐力	Travel Motor Brand	Ruili
马达排量	375	Motor Displacement	375







装载机系列
Loader series

ME35-履带

性能特点/CHARACTERISTIC

- 机动性能强
  Excellent maneuverability
- 工作效率高
  High working efficiency
- 使用成本低
  Low operating cost
- 适用场景广
  Wide range of applicable scenarios



产品参数/Product parameters

整机工作重量(Kg)	2400	Operating Weight(Kg)	2400
发动机品牌	润通	Engine Brand	Runtong
发动机型号	825D	Engine Model	825D
最大马力(ps)	32.6	Maximum Horsepower (ps)	32.6
多路阀	5路多路阀	Multi-way Valve	5-way Multi-way Valve
主泵品牌	天津行走	Main Pump Brand	Tianjin Travel
铲斗容量(m^3)	0.18	Main Pump Brand	0.18
整机尺寸(mm)	2660*910*1810	Overall Dimensions (mm)	2660*910*1810
燃料形式	汽油	Fuel Type	Gasoline
液压油箱(L)	25	Hydraulic Tank Capacity (L)	25
燃油箱(L)	25	Fuel Tank Capacity (L)	25
多路阀品牌	泰恒	Multi-way Valve Brand	Taiheng
主泵类型/型号	PGP5123GLP	Main Pump Type/Model	PGP5123GLP
最大工作高度(mm)	3019	Maximum Working Height (mm)	3019
最大卸载高度(mm)	1959	Maximum Dumping Height (mm)	1959
行走形式	履带式	Travel Mode	tracked
发动机油更换量(L)	2.4	Engine Oil Capacity (L)	2.4
上车宽度(mm)	650	Upper Frame Width (mm)	650
行走马达品牌	锐力	Travel Motor Brand	Ruili
马达排量	375	Motor Displacement	375









装载机系列
Loader series

ME65

性能特点/CHARACTERISTIC

- 机动性能强
  Excellent maneuverability
- 工作效率高
  High working efficiency
- 使用成本低
  Low operating cost
- 适用场景广
  Wide range of applicable scenarios

产品参数/Product parameters

整机工作重量(Kg)	3400	Operating Weight(Kg)	3400
发动机品牌	全柴	Engine Brand	Quanchai
发动机型号	V27	Engine Model	V27
最大马力(ps)	57	Maximum Horsepower (ps)	57
铲斗容量(m^3)	0.46	Main Pump Brand	0.46
整机尺寸(mm)	1950*875*1320	Overall Dimensions (mm)	1950*875*1320
燃料形式	柴油	Fuel Type	Gasoline
液压油箱(L)	40	Hydraulic Tank Capacity (L)	40
燃油箱(L)	40	Fuel Tank Capacity (L)	40
最大工作高度(mm)	4215	Maximum Working Height (mm)	4215
最大卸载高度(mm)	2550	Maximum Dumping Height (mm)	2550
行走形式	轮胎式	Travel Mode	Wheel Type
发动机油更换量(L)	1.6	Engine Oil Capacity (L)	1.6
行走马达品牌	丹佛斯	Upper Frame Width (mm)	Danfoss





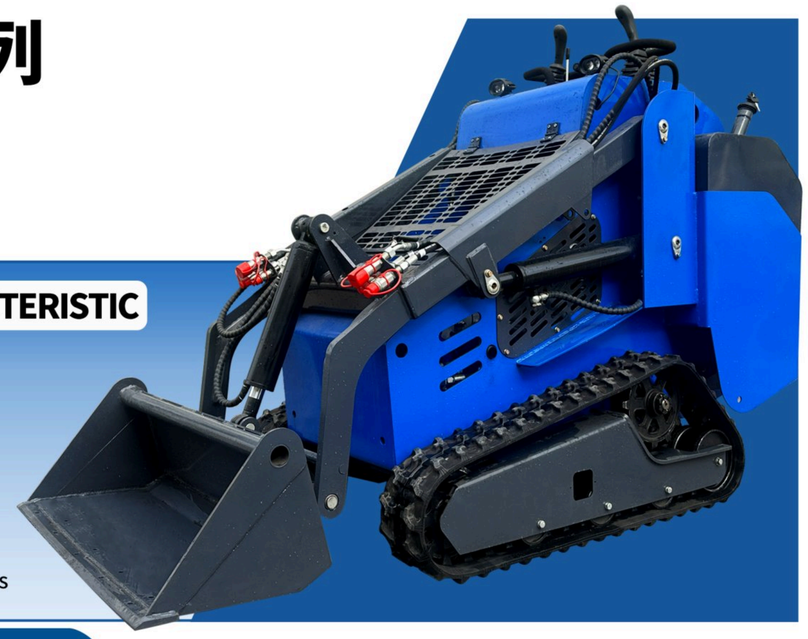


装载机系列
Loader series

ME1200

性能特点/CHARACTERISTIC

- 机动性能强
  Excellent maneuverability
- 工作效率高
  High working efficiency
- 使用成本低
  Low operating cost
- 适用场景广
  Wide range of applicable scenarios



产品参数/Product parameters

发动机型号	润通740	Engine Model	Runtong 740
整机尺寸(mm)	2400*1025*1542	Overall Dimensions (mm)	2400*1025*1542
总重量(kg)	1200	Operating Weight (kg)	1200
行走速度 低/高速(Km/h):	0-6	Travel Speed Low/High (km/h):	0-6
爬坡能力(%):	25	Gradeability (%):	25
铲斗容量 (m^3):	0.12	Bucket Capacity (m^3):	0.12
最大举升力(Kg):	1650	Maximum Lifting Force (kg):	1650
最大工作高度(mm):	1780	Maximum Working Height (mm):	1780
最大卸载高度(mm):	3100	Maximum Dumping Height (mm):	3100
最大转速(rpm):	2400	Max. Speed (rpm):	2400
最大功率(Kw):	11.2	Max. Power (Kw):	11.2
铲斗宽度(mm):	1016	Bucket Width (mm):	1016
发动机油更换量(L):	1.6	Engine Oil Capacity (L):	1.6
额定设定压力(Mpa):	16	Rated Pressure (Mpa):	16
主泵最大流量(L/min):	75.6	Main Pump Max. Flow (L/min):	75.6
橡胶(带宽*节距*节数)(mm):	1800*720*420	Rubber Track (Width × Pitch × Number of Links)(mm):	1800*720*420
燃油箱(L):	40	Fuel Tank Capacity (L):	40
液压油箱（L)	40	Hydraulic Oil Tank Capacity (L):	40







小象重工集团
MINI ELEPHANT HEAVY INDUSTRY GROUP

03

叉车系列

Forklift series





叉车系列
Forklift series

ME15

性能特点/CHARACTERISTIC

- 性能持久稳定
Prolonged and stable performance
- 车身可负重托
The vehicle body can bear weight and support.
- 操作灵活精准
Operational flexibility and precision

产品参数/Product parameters

双油缸叉车	C型钢门架	double-cylinder forklift	C-channel steel mast
前轮胎型号	实心650-10	front tire model	Solid tire 650-10
后轮胎型号	实心500-8	rear tire model	Solid tire 500-8
工作时间(h)	6-8小时	working hours(h)	6-8 hours
升起重量(Kg)	1500	lifting capacity(Kg)	1500
提升高度(m)	3（可定制高度）	lifting height(m)	3 (customizable height)
整机尺寸(mm)	2300*1200*2150	overall dimensions(mm)	2300*1200*2150
货叉尺寸(mm)	1220	fork dimensions(mm)	1220
工作电压(v)	60	operating voltage(v)	60
转向系统	液压转向	steering system	hydraulic steering
行走电机	4500w	Travel Motor	4500w
举升电机	无刷4000w	Hoist Motor	Brushless 4000W
制动	油刹	braking system	hydraulic brake
电池配置	200型5块150ah	battery configuration	5 pcs Type 200 battery, 150 Ah each









叉车系列
Forklift series

ME20

性能特点/CHARACTERISTIC

- 性能持久稳定
Prolonged and stable performance
- 车身可负重托
The vehicle body can bear weight and support.
- 操作灵活精准
Operational flexibility and precision

产品参数/Product parameters

双油缸叉车	C型钢门架	double-cylinder forklift	C-channel steel mast
前轮胎型号	实心650-10	front tire model	Solid tire 650-10
后轮胎型号	实心500-8	rear tire model	Solid tire 500-8
工作时间(h)	6-8小时	working hours(h)	6-8 hours
升起重量(Kg)	2000	lifting capacity(Kg)	2000
提升高度(m)	3（可定制高度）	lifting height(m)	3 (customizable height)
整机尺寸(mm)	2300*1200*2150	overall dimensions(mm)	2300*1200*2150
货叉尺寸(mm)	1220	fork dimensions(mm)	1220
工作电压(v)	60	operating voltage(v)	60
转向系统	液压转向	steering system	hydraulic steering
举升电机	无刷4000w	lifting motor	4000 W brushless motor
行走方式	无极变速	travel mode	stepless speed change
制动	油刹	braking system	hydraulic brake
电池配置	200型5块150ah	battery configuration	5 pcs Type 200 battery, 150 Ah each









叉车系列
Forklift series

ME30

性能特点/CHARACTERISTIC

- 性能持久稳定
  Prolonged and stable performance
- 车身可负重托
  The vehicle body can bear weight and support.
- 操作灵活精准
  Operational flexibility and precision

产品参数/Product parameters

双油缸叉车	C型钢门架	double-cylinder forklift	C-channel steel mast
前轮胎型号	实心650-10	front tire model	Solid tire 650-10
后轮胎型号	实心500-8	rear tire model	Solid tire 500-8
工作时间(h)	6-8	working hours(h)	6-8 hours
升起重量(Kg)	3000	lifting capacity(Kg)	3000
提升高度(m)	3（可定制高度）	lifting height(m)	3 (customizable height)
行走电机(w)	7500	travel motor(w)	7500
货叉尺寸(mm)	1220	fork dimensions(mm)	1220
工作电压(v)	60	operating voltage(v)	60
转向系统	液压转向	steering system	hydraulic steering
举升电机	无刷7500w	lifting motor	7500 W brushless motor
行走方式	无极变速	travel mode	stepless speed change
制动	油刹	braking system	hydraulic brake
电池配置	200型10块150ah	battery configuration	10 pcs Type 200 battery, 150 Ah each







产品更新中.....

- 支持OEM代加工
- 支持特殊需求定制





叉装机系列
Forklift Loader Series

ME600



性能特点/CHARACTERISTIC

- 机动性能强
  Excellent maneuverability
- 工作效率高
  High working efficiency
- 使用成本低
  Low operating cost
- 适用场景广
  Wide range of applicable scenarios

产品参数/Product parameters

发动机品牌	润通	Engine Brand	Run Tong
发动机型号	420	Engine Model	420
行走液压式马达	390	Travel Hydraulic Motor	390
行走马达品牌	富康	Travel Motor Brand	Fu Kang
马达排量	10-12	Motor Displacement	10-12
多路阀	两组(3+2)手动阀	Multi-way Valve	Two Sets of (3/2)
多路阀品牌	泰恒	Multi-way Valve Brand	Tai Heng
额定设定压力（Mpa）	16	Rated Setting Pressure (MPa)	16
整机工作重量（Kg）	1.65	Machine Operating Weight (kg)	1.65
整机尺寸（mm）	2430*720*1390	Overall Machine Dimensions (mm)	2430*720*1390
铲斗容量	1140	Bucket Capacity	1140
行走速度 低/高速（km/h）	150	Travel Speed Low/High (km/h)	150
爬坡能力（%）	1300	Gradeability (%)	1300
最大举升力（Kg）	1600	Maximum Lifting Capacity (kg)	1600
最大工作高度（mm）	2350	Maximum Working Height (mm)	2350
最大引脚高度B(mm)	1950	Maximum Pin Height B (mm)	1950
最大卸载高度A(mm)	1680	Maximum Dumping Height A (mm)	1680
最大卸载高度时装载距离(mm)	675	Load Distance at Maximum Dumping Height	675
轮距H(mm)	880	Wheel Track H (mm)	880
铲斗宽度E(mm)	1100	Bucket Width E (mm)	1100
整机尺寸（mm）	2290*1110*2150	Overall Machine Dimensions(mm)	2290*1110*2150









运输车系列
Transport Vehicle Series

ME500



性能特点/CHARACTERISTIC

- 载重量大爬坡能力强
  High load capacity and strong climbing performance
- 运输效率高行驶速度稳
  High transportation efficiency and stable driving speed
- 综合油耗低排放噪音
  Low comprehensive fuel consumption, low emissions and low noise

产品参数/Product parameters

发动机型号	Engine Model	百力通Vanguard™ 200/Briggs & Stratton Vanguard™ 200	底盘离地间隙(mm)	Chassis Ground Clearance (mm)	110
动力种类	Power Type	单缸、0HV四冲程、风冷/ single-cylinder、OHV four-stroke、air-cooled	料斗容量(dm^3)	Hopper Capacity (dm^3)	200
排量(cc)	Displacement (cc)	203	底盘宽度(mm)	Chassis Width (mm)	700
额定功率(kw/rpm)	Rated Power (kW/rpm)	4.8/3600	履带宽度(mm)	Track Width (mm)	180
马力(hp)	Horsepower (hp)	6.5	履带接地长度(mm)	Track Ground Contact Length (mm)	1000
燃油型号	Fuel Type	92# 汽油	行走性能速度(km/h)	Travel Speed (km/h)	2.88
燃油消耗(g/kw·h)	Fuel Consumption (g/(kW·h)	≤0.395	液压油品号	Hydraulic Oil Grade	46#
油箱容量(L)	Fuel Tank Capacity (L)	3.1	液压油箱容量(L)	Hydraulic Tank Capacity (L)	15
机油容量(L)	Oil Capacity (L)	0.6	最小回转半径(mm)	Minimum Turning Radius (mm)	1150
机体重量(Kg)	Engine Weight (kg)	442	履带中心距(mm)	Track Gauge (mm)	520
最大载重(Kg)	Maximum Load Capacity (kg)	500	底盘离地间隙(mm)	Chassis Ground Clearance (mm)	100
机体尺寸(mm)	Engine Dimensions (mm)	1570x880x1300	爬坡能力(°)	Gradeability (°)	20
货箱尺寸（mm)	Cargo Box Dimensions (mm)	1050x730x730	翻斗角度(°)	Tipper Angle (°)	100







06

挖掘装载机系列

Backhoe Loader Series



挖掘装载机系列
Backhoe Loader Series

ME20



性能特点/CHARACTERISTIC

- 操作便捷灵活
  Easy and flexible operation
- 挖掘平稳有力
  Stable and powerful excavation
- 挖掘平稳有力
  Strong loading power
- 车身坚固耐用
  Robust and durable body

产品参数/Product parameters

发动机型号	Engine Model	莱动385/Laidong 385	底盘离地间隙(mm)	Chassis Ground Clearance (mm)	110
动力种类	Power Type	三缸、柴油、水冷 3-cylinder, Diesel, Water-cooled	料斗容量(dm^3)	Hopper Capacity (dm^3)	200
排量(cc)	Displacement (cc)	203	底盘宽度(mm)	Chassis Width (mm)	700
额定功率(kw/rpm)	Rated Power (kW/rpm)	4.8/3600	履带宽度(mm)	Track Width (mm)	180
马力(hp)	Horsepower (hp)	6.5	履带接地长度(mm)	Track Ground Contact Length (mm)	1000
燃油型号	Fuel Type	0#柴油/#0 Diesel	行走性能速度(km/h)	Travel Speed (km/h)	2.88
燃油消耗(g/kw·h)	Fuel Consumption (g/(kW·h)	≤0.395	液压油品号	Hydraulic Oil Grade	46#
油箱容量(L)	Fuel Tank Capacity (L)	3.1	液压油箱容量(L)	Hydraulic Tank Capacity (L)	15
机油容量(L)	Oil Capacity (L)	0.6	最小回转半径(mm)	Minimum Turning Radius (mm)	1150
机体重量(Kg)	Engine Weight (kg)	442	履带中心距(mm)	Track Gauge (mm)	520
最大载重(Kg)	Maximum Load Capacity (kg)	500	底盘离地间隙(mm)	Chassis Ground Clearance (mm)	100
机体尺寸(mm)	Engine Dimensions (mm)	1570x880x1300	爬坡能力(°)	Gradeability (°)	20

发动机可选：莱动385欧五、久保田D902/Engine Options: Laidong 385 (Euro V), Kubota D902







07

压路机系列

Road Roller Series



压路机系列
Road Roller Series

ME080



性能特点/CHARACTERISTIC

- 行驶平稳有力
  Smooth and powerful travel
- 操作便捷灵活
  Convenient and flexible operation
- 动力持久强劲
  Durable and strong power
- 质量优质稳定
  High-quality and stable performance

产品参数/Product parameters

工作重量(Kg)	600	Working weight(Kg)	600
激振力(Kn)	35	Exciting force(Kn)	35
振幅(mm)	0.6	Amplitude(mm)	0.6
振动频率(Hz)	70	Vibration frequency(Hz)	70
行走速度(Km/h)	0-6	Travel speed(Km/h)	0-6
爬坡能力(%)	30	Climbing ability (%)	30
外形尺寸(mm)	1670*855 *1055	Overall dimensions(mm)	1670*855 *1055
钢轮尺寸(mm)	滚轮长800直径560	Steel wheel size(mm)	Roller length 800, diameter 560
发动机型号	润通420	Engine type	Runtong 420
驱动方式	单驱动液压传动	Driving mode	Single-drive hydr
振动方式	全液压	Mode of vibration	Full hydraulic system
水箱容积(L)	30	Tank volume (L)	30









压路机系列
Road Roller Series
ME150

性能特点/CHARACTERISTIC

- 行驶平稳有力
  Smooth and powerful travel
- 操作便捷灵活
  Convenient and flexible operation
- 动力持久强劲
  Durable and strong power
- 质量优质稳定
  High-quality and stable performance

产品参数/Product parameters

工作重量(Kg)	1500	Working weight (Kg)	1500
激振力(Kn)	30	Exciting force (Kn)	30
振幅(mm)	0.6	Amplitude (mm)	0.6
振动频率(Hz)	75	Vibration frequency (Hz)	75
行走速度(Km/h)	0-15	Travel speed (Km/h)	0-15
爬坡能力(%)	30	Climbing ability (%)	30
外形尺寸(mm)	1670*855 *1055	Overall dimensions(mm)	1670*855 *1055
振动方式	全液压	Mode of vibration	Full Hydraulic
钢轮尺寸(mm)	滚轮长800直径560 前后双钢轮	Steel wheel size (mm)	Roller: Length 800, Diameter 560 Dual front and rear steel drums
发动机型号	润通420	Engine type	Runtong 420
驱动方式	单驱动液压传动	Driving mode	Single drive, hydraulic transmission







压路机系列
Road Roller Series
ME200

性能特点/CHARACTERISTIC

- 行驶平稳有力
  Smooth and powerful travel
- 操作便捷灵活
  Convenient and flexible operation
- 动力持久强劲
  Durable and strong power
- 质量优质稳定
  High-quality and stable performance



产品参数/Product parameters

工作重量(Kg)	2000	Working weight (Kg)	2000
激振力(Kn)	30	Exciting force (Kn)	30
振幅(mm)	0.5	Amplitude (mm)	0.5
振动频率(Hz)	75	Vibration frequency (Hz)	75
行走速度(Km/h)	0-9	Travel speed (Km/h)	0-9
爬坡能力(%)	30	Climbing ability (%)	30
外形尺寸(mm)	2200*1100*1700	Overall dimensions(mm)	2200*1100*1700
振动方式	全液压	Mode of vibration	Full Hydraulic
钢轮尺寸(mm)	1000*560	Steel wheel size (mm)	1000*560
发动机型号	润通740	Engine type	Runtong 740
驱动方式	液压振动	Driving mode	Hydraulic vibration







小象重工集团
MINI ELEPHANT HEAVY INDUSTRY GROUP

08

割草机系列

Lawn Mower Series





割草机系列
Lawn Mower Series

ME500-轮式

性能特点/CHARACTERISTIC

- 远程遥控可轻松驾驭
  Easy to control via remote operation
- 履带行走全地形适应
  Track-driven travel for all-terrain adaptability
- 精钢刀片可长久使用
  High-quality steel blades for long service life

产品参数/Product parameters

总重量(Kg)	105	total weight(Kg)	105
发动机	/	engine	N/A
发动机型号	RATO225	engine model	RATO225
启动方式	遥控	starting method	remote control
外形尺寸(mm)	980*880*460	overall dimensions(mm)	980*880*460
切割宽度(mm)	500	cutting width (mm)	500
切割高度(mm)	70	cutting height (mm)	70
行走速度(Km/h)	5公里/一小时	travel speed	5
电压和电量	24伏70安时	voltage and power capacity	24 V 70 Ah
爬坡角度(°)	35°	climbing angle	35°
电池续航时间(h)	3-4小时	battery life / battery	3–4
油箱容量(L)	1.2升	fuel tank capacity	1.2
燃油消耗量(L/h)	1.2升/小时	fuel consumption rate	1.2







割草机系列
Lawn Mower Series

ME800



性能特点/CHARACTERISTIC

- 远程遥控可轻松驾驭
  Easy to control via remote operation
- 履带行走全地形适应
  Track-driven travel for all-terrain adaptability
- 精钢刀片可长久使用
  High-quality steel blades for long service life

产品参数/Product parameters

整机重量(Kg)	260	machine weight(Kg)	260
发动机品牌	润通RV550	engine brand	RATO RV550
马力(ps)	16	horsepower(ps)	16
排量(cc)	550	displacement(cc)	550
启动方式	电启动	starting method	electric start
发电机	24V/1500W	generator	24V/1500W
整机尺寸(mm)	1350*1220*1050	overall dimensions(mm)	1350*1220*1050
水箱容积(L)	80	water tank capacity(L)	80
橡胶履带(带宽*节距*节数)	150*60*42	rubber crawler (width × pitch × number of sections)	150*60*42
刀盘高低(mm)	0-150	cutter head height	0-150
电瓶品牌	超威/天能	battery brand	Chaowei / Tianneng
割草宽度(mm)	800	mowing width(mm)	800








以客户为中心，以奋斗者为本，长期坚持艰苦奋斗，建设一座幸福的小象工厂！
为客户提供物超所值的匠心产品和温馨满意的服务